



东莞市发台机械科技有限公司
DONGGUAN FATAEL MACHINERY
TECHNOLOGY CO.,LTD

廠址：東莞市厚街鎮橋頭社區第二工業
區北二路1號

Add: No.1, North 2 Rd, 2nd Industrial District,
QiaoTou, HouJie Town, DongGuan City.

電話 Tel: 0769-85915667 85913617

傳真 Fax: 0769-85913597

E-mail: fatael@aliyun.com

[Http://www.dgfatael.com](http://www.dgfatael.com)



官網二維碼
Official Website QR Code

0769-85913617

专业·技术·服务
Professional,
Technical and Service



FATAEL
MACHINERY INDUSTRIAL CO.,LTD
发台机械科技有限公司

[Http://www.dgfatael.com](http://www.dgfatael.com)



全國服務熱線: 13922501307

中国·东莞
DONGGUAN · CHINA



您的要求是我们的动力！
挑战极限，不断追求创新
是我们的目标。
选择发台设备会让您物超所值！
Your Request is our Driving Force!
Our Goal is to Challenge the Limit
and Constantly Pursue Innovation.
Choose "Fatael Equipment"
Will Let You Get More Value for Money!

挑战极限，不断追求创新
Our Goal is to Challenge the Limit
and Constantly Pursue Innovation.

创新
INNOVATION



公司简介

INTRODUCTION

本公司源启于台湾萬盟機械工業有限公司。自1975年創立萬盟機械公司以來，專業研發塑膠粉碎機、塑膠再生與回收機械及其周邊設備，于1984年改為发台工業有限公司，2018年公司重組，更名為东莞市发台機械科技有限公司，是一家集設計、開發、制造為一體的技術型企業。

近三十年來，本公司秉承“品質第一，技術創新，服務迅捷”理念，為客戶提供價格合理、性能優越的塑膠加工設備，不斷進行技術研發，不斷擴大業務範圍。在发台人全體同仁的共同努力，公司與時俱進，不斷發展壯大，已成為行業標杆企業。

未來，本公司將為客戶提供多元化、高性價比的產品，領航塑膠加工設備行業，譜寫新的篇章！

The company originated from Taiwan wanMeng machinery industry co. LTD. Since founded in 1975 than au machinery company, professional research and development of plastic crusher, regeneration and recycling of plastic machinery and its peripheral equipment, in 1984 changed to machine industry co., LTD., In 2018, the company was reorganized and renamed as dongguan fatael machinery technology Co., Ltd. is a set design, development, manufacturing as one of the technology-oriented enterprises.

Nearly 30 years, the company adhering to the "quality first, technology innovation, service" concept, providing customers with reasonable price, superior performance of plastic processing equipment, ongoing technology research and development, expanding business scope. With the joint efforts of all the staff in Taiwan, the company keeps pace with the times It has become a benchmark enterprise in the industry.

In the future, our company will provide customers with diversified and cost-effective products, leading the plastic processing equipment industry, write a new chapter!

发展

▼ PROCESS
历程

盛
强

2018年

公司重组，更名为东莞市发台机械科技有限公司。

责
任

2008年

成功研发系列橡膠顆粒粉碎機，并投入生產。

荣
誉

2004年

成功研發磨粉機、脫水機……等設備。

创
新

2003年

研發24寸大管徑PVC管粉碎機，馬力150HP-300HP。研發高效之兩段式細粉碎流程，顆粒0.8-2.0mm。研發超軟質之硅膠擠碎機。

战
略

2001年

投資上海青浦區成立上海发台机械模具有限公司，專制模座與機械之生產。同年引進台灣登峰造自動科技股份有限公司之耳料自動立即回收機之原廠技術，開發靜音粉碎、水口料立即回收機。

拓
展

2000年

自建廠房3600多平方，購入加工機一批；并研發PET礦泉水瓶之粉碎清洗回收設備流程。

发
展

1999年

成功研發水冷式粉碎機流程，PP、PE雙脫氣式押出再生造粒機，及其周邊設備。

成
长

1998年

遷廠廣東省東莞市厚街鎮命名為東莞市厚街发台塑膠機械廠，研發立式太空儲料桶、雙層加熱式攪拌干燥機、可轉式高速混料機、磨刀機、雷達式混色機、油壓裁斷機。

诞
生

1996年

進入中國大陸市場，設廠于福建，致力於開發四支固定刀之高效率粉碎機。



企業文化
Corporate profile
創新卓越 領航發展

创新

合作

团结

发展

共赢

01 核心價值觀： CORE VALUES

人才、創新、平台、分享、共赢

Talent, Innovation, Platform, Sharing, Win-win

02 經營理念： PHILOSOPHY

以人為本，誠信經營，不斷革新，
與時俱進！

People Oriented, Credit Management,
Continuous Innovation, Keeping Pace
with the Times!

03 公司願景： OUR VISION

持續改善，打造優秀團隊，作行業標杆！

Continuous Improvement, Excellent Team
Building, Industry Benchmarking!

No1. 强力粉碎機系列

Powerful Crusher Series	
水冷式强力粉碎機系列.....	1~3
Water-cooling Type Powerful Crusher Series	
五排刀强力粉碎機系列.....	4
5-Row Knife Powerful Crusher Series	
剪切式强力粉碎機系列.....	5~6
Tilt Cutting Powerful Crusher Series	
静音水口料立即回收設備系列.....	7
Slow Silent Side-gate Instant Recycling Machine Series	
斜刀剪切强力粉碎機系列.....	8~9
Tilt Cutting Powerful Crusher Series	

No2. 回收設備系列

Recycling Equipment Series	
海绵細碎粉碎機系列.....	10
Sponge Fine Crushing Machine Series	
耳料回收機系列.....	11~13
Waste Material Recycling Machine Series	
薄膜粉碎料計量回收系統.....	14
Thin Film Crushing Material Metering Recovery System	

No3. 攪拌機及混色機系列

Blending Machine & Mixing Machine Series	
卧式加熱乾燥攪拌機系列.....	15
Horizontal Type Heating and Drying Blending Machine Series	
混色機及雷達式混合機系列.....	16
Mixing Machine & Radar Type Dyestuff Mixing Machine Series	
立式、滾桶式混色機系列.....	17
Vertical Type、Roller Mixing Machine Series	
立式貯料攪拌機系列.....	18
Vertical Type Storage Blending Machine Series	

No4. 振動篩選機、磨刀機及切粒機、輸送機系列

Vibrating Screen Machine、Knife Grinder、Plastic Palletizing Machine Series	
油壓裁斷機、切粒機.....	19~20
Hydraulic Cutting Machine、Plastic Palletizing Machine	
振動篩選機、螺桿輸送機、重切削用刀磨刀機系列.....	21~22
Vibrating Screen Machine、Screw Conveyor Series、Knife Grinder	

No5. 高速磨粉機、强力粉碎機系列

High-speed Flour Mill、Powerful Granulating Machine Series	
高速磨粉機系列.....	23
High-speed Flour Mill Series	

No5. 造粒整廠設備系列

Granulation Complete Sets of Equipment Series	
高速染色造粒整廠設備.....	24~25
High-Speed Dyeing & Granulation Complete Sets of Equipment	
雙脫氣子母型塑膠再生造粒機.....	26~27
Sub-Female Type Granulation Complete Sets of Equipment	
T.R.P類塑膠高速造粒整廠設備.....	28~29
Granulation Complete Sets of Equipment for T.R.P Plastic	

POWERFUL

Crushing Machine Series

强力粉碎機刀座系列



平式刀座機械結構
Mechanical Structure of
Horizontal Knife Base



爪式刀座機械結構
Mechanical structure
of claw knife base

用途：Application

- 适用于PVC、PP、PE、ABS475、NYLON各類塑膠及薄膜及樹脂、飼料、藥材、木材...等強力快速粉碎。
- Suitable for all kinds of plastic PVC, PP, PE, ABS475, NYLON plastic film and resin, feed, medicine, wood.... Etc. Strong and fast crushing.

特點：Feature

- 采用進口優質工具鋼，特製刀具，刀具安裝設計可伸縮調整，用鈍後可多次研磨，反復多次使用。
- 動刀座為梯級剪式設計，使切屑受力分解而屑力成倍增長。
- 機體使用鋼板焊接而成，剛柔合理、不易破裂磨損，採用高強度(8.8)鋼螺絲緊固，結構堅固耐用。
- 機械主體軸心與兩端面由高精度座標鏜一次加工完成，確保同心度及垂直度誤差不大於0.05mm，每個零件部份都設定基準孔、面進行粗、精兩次流水加工工藝，部件互換性強、精度高。
- 配裝重負荷型軸承及於破碎室設置雙層密封裝置，動刀配合間隙小於0.55mm，防止粉碎粉末入軸承座內而加重電機負荷，克服了破碎機的關鍵故障因素。
- 分離設計，落料斗門，粉碎機主體過濾網底座均按基準孔裝配，極易拆洗，清料設有清洗料室，調整刀具保護擊，確保清洗或調整時的安全。
- 電機裝置過荷裝置，與電源連鎖保護系統，設立糾錯功能，對失相和錯誤的連接，本機將停止工作，保障安全。
- 耗電省、節能、粉碎效果特佳，底座裝置滑輪，移動方便體積精巧不占空間。

- Specially made of imported excellent tool steel, the cutter is very durable, its installment is adjustable and it can be sharpened for many times when becoming blunt, so it can be repeatedly used for a very long time.
- The cutter stand is designed as a step-shearing style, which can resolve the force bored by folds.
- Machine body jointed with steel plates, which has moderate hardness and softness to avoid any breakage or wear-and-tear. Even screws used to fasten the stand are made of high-strength steel(8.8).
- The axis bore of the main body and the two ends of the machine are of once-through process by the high-precision jip boring machine to ensure that the concentricity and the verticality errors are not more than 0.05mm. Each part of the machine has datum they have high interchangeability and precision.
- It is equipped with heavy-loading bearings and a double-sealed crushing chamber. The clearance between two coordinating cuttings is less than 0.55mm to prevent crushed powder from leaking into the bottom of the bearing stand, which will over-burden the motor. The it helps to shoot the major trouble of the crushing machine.
- The machine is designed to be disassembled and its discharging dipper main frame and the stand of filter net are all fixed as per datum bores. So it is very easy to disassemble and clean. It is also equipped with a washing chamber and a protection brake for cutter adjustment to ensure safety while cleaning or adjusting.
- Motor is provided with an over-loading protection device and a protection system linked with power to guarantee safety.
- It is featured in electricity-saving, energy-saving and excellent crushing effect. Rollers are fixed on its bottom to provided convenient moving. It is small in size and occupies less space.

POWERFUL

Crushing Machine Series

水冷式強力粉碎機系列



FT-240A 橡膠EPDM顆粒粉碎機

FT-240A Rubber EPDM Granules Crusher

用途及特點: Application & Feature

- 此種機型4排固定刀及循環水冷卻系統設計粉碎能力強, 無論硬質、軟質、薄膜、紗物均能快速的粉碎, 用途廣泛適合各種大型塑膠製品塊狀料及管材。
- The machine is designed with 4-row fixing knives and cycle water cooling system, powerful granulating ability, it can granulate the material for rigid, soft, film and yarn fast, widely suitable for various plastid products.

主要技術參數: Specification

型號	馬力	回轉直徑(Φ)	入料口尺寸	回轉刀數	固定刀數	工作量	機械重量	機械尺寸
Model	HP	mm	Inlet Size	Rotary Cutters	Fixed Cutters	Capacity	N.W	Machine Size
			mm	Pcs	Pcs	Kg	Kg	(LxWxH)mm
FT-215A	15HP	300	400x250	3排x1PC	4排x1PC	400~600	800	1400x920x1400
FT-221A	30HP	380	550x300	3排x1PC	4排x1PC	500~850	1200	1500x1200x1600
FT-225A	30HP	380	650x300	3排x1PC	4排x1PC	550~950	1350	1600x1300x1700
FT-230A	40HP	420	780x340	3排x3PC	4排x2PC	650~1050	1700	1600x1500x1800
FT-230C	40HP	600	780x500	3排x3PC	4排x2PC	1200~1600	1800	1600x1500x1850
FT-240C	50HP	600	1010x500	3排x4PC	4排x2PC	1500~2000	2800	1700x1700x1850

※ 以上技術參數僅供參考, 如有變更, 恕不另行通知! The above technical parameters are for reference only and are subject to change without prior notice.




FT-221A 粉碎機

FT-221A Crusher

POWERFUL

Crushing Machine Series

水冷式強力粉碎機加裝輸送組合系列

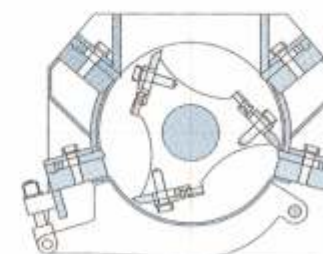

四支固定刀結構示意圖
Structure Diagram of 4 Knives

特點: Feature

- 機體使用鋼板焊接而成, 及進口刀具, 軸承等裝配組合, 堅固耐用。
- 此種機型4排固定刀及循環水冷卻系統設計, 粉碎能力強, 無論硬質、軟質、薄膜、紗物均能快速的粉碎, 用途廣泛適合各種大型塑膠製品、塊狀料及管材。
- 粉碎物的分類, 換料, 清料, 簡便快速。
- 機械運轉時穩定, 噪音低, 提高工作效率與產量。
- 可依客戶的要求來設計機械及變更。
- The machine body jointed with steel plates, specially made of imported excellent cutter, the axis bore.
- The machine is designed with 4-row fixing knives and cycle water cooling system, powerfull granulating ability, it can granulate the material for rigid, soft, film and yarn fast, widely suitable for various plastic products.
- Easy for granulating machine to classify, material change-and clean.
- Stable mechanical running and low noise, it can increase work efficiency and output.
- We can design it as customer required.



配置皮帶輸送設備粉碎機

Crushing Machine with Belt Conveyor



配置自動裝袋設備粉碎機

Crushing Machine with Auto. Bagging Equipment


POWERFUL

Crushing Machine Series

五排刀強力粉碎機系列

用途及特點: Application & Feature

- 此種機型2排固定刀設計, 粉碎能力強, 這種機型專為大機殼設計, 粉碎室大, 如電視殼, 電腦殼等。粉碎物的分類, 換料, 清料簡便快速。機械運轉時穩定, 噪音低, 提高工作效率與產量。
- The machine is designed with 2-row fixing knives, powerful granulating ability, the machine design with fixed cutting tools, granulating room is large, such as TV case, PC case etc. Easy for granulating machine to classify, material change and clean. Stable mechanical running and low noise, it can increase work efficiency and output.

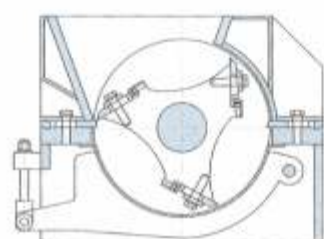

兩支固定刀結構示意圖
Structure Diagram of 2 Knives



FT-540D 粉碎機
FT-540D Crusher



配置風車輸送設備粉碎機

Crushing Machine with
Windmill Conveyor



FT-515D 粉碎機
FT-515D Crusher

主要技術參數: Specification

型號	馬力	回轉直徑(Φ)	入料口尺寸	回轉刀數	固定刀數	工作量	機械重量	機械尺寸
Model	HP	mm	mm	Pcs	Pcs	Kg	Kg	(LxWxH)mm
FT-515B	15HP	310	400x300	3排x2PC	2排x1PC	300~450	600	1450x850x1300
FT-520B	25HP	360	526x350	3排x2PC	2排x1PC	500~650	850	1500x1200x1600
FT-530B	30HP	420	780x400	3排x3PC	2排x2PC	700~900	1200	1600x1300x1700
FT-520D	30HP	420	526x400	3排x2PC	2排x1PC	600~800	1000	1500x1200x1700
FT-530D	40HP	520	780x500	3排x3PC	2排x2PC	800~1000	1500	1600x1500x1700
FT-540D	50HP	620	1010x550	3排x4PC	2排x2PC	1000~1200	1800	2500x1750x1900

※ 以上技術參數僅供參考, 如有變更, 恕不另行通知! The above technical parameters are for reference only and are subject to change without prior notice.

FT450系列

Crushing Machine Series


剪裁式強力粉碎機

特點: Feature

- 清潔內部快速方便: 下機體與篩網一起開啟, 機體內部一覽無遺。內部清潔快速、有效。開啟方式以氣缸控制, 省力、便利。
- 更換刀具快速便捷: 換刀不需開啟入料斗, 直接以氣缸開啟下機體, 進行換刀作業。
- 剪裁式交叉下刀設計: 4排回轉刀, 第1、3排左斜, 第2、3排右斜, 兼顧平衡效果及集中粉碎, 不會讓粉碎料集中在粉碎機室的某一邊。提高效率及降低電機使用功率。
- 因回轉刀改為4排, 故下料速度增加、固定刀改為3排, 加大篩網面積, 增加出料量。此設計讓粉碎機的產量明顯的提升。
- Easy to clean the chemble: the lower body and screen can be open together by air cylinder. The whole chamber can be seen clearly, the chamber can be clean by air gun.
- Easy to change Knife: changing knives only need to open lower body by air cylinder, no need to open and take off the hopper.
- Cutting like scissors: there are 4 cutting blades. the 1st and 3rd blades incline from right side to left. The 2nd and 4th blades incline from left side to right. The balance and central crush are considered. Not only enhance efficiency but also reduce the power consumption.
- Due to 4 rows of rotary knife, so the cutting speed increases, the fixed blade to 3 rows, increase the screen area, increasing the quantity. This design allows the mill yields significantly improved.

用途: Application

- FT450系列粉碎機使用與PP/PE/ABS/PS等薄膜、薄片材、型材快速粉碎用。
- FT450 series mill use PP / PE / ABS / PS and other films, sheets, shapes quickly crushed by.

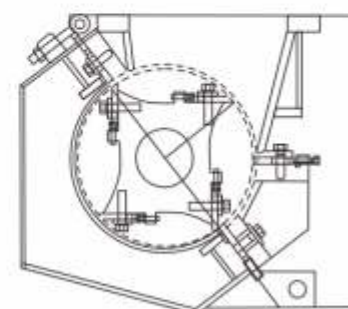

刀結構示意圖
Knives Structure Diagram



主要技術參數: Specification


型號	馬力	回轉直徑(Φ)	入料口尺寸	回轉刀數	固定刀數	工作量	機械重量	機械尺寸
Model	HP	mm	mm	Pcs	Pcs	Kg	Kg	(LxWxH)mm
FT-450-20	30HP	450	530x350	8	6	500~950	2000	1900x1400x2000
FT-450-32	40HP	450	830x400	8	6	650~1100	2500	2200x1600x2000
FT-450-40	60HP	450	1050x450	8	6	800~1500	3000	2200x1800x2000

※ 以上技術參數僅供參考, 如有變更, 恕不另行通知! The above technical parameters are for reference only and are subject to change without prior notice.

POWERFUL

Crushing Machine Series

斜剪式強力粉碎機系列

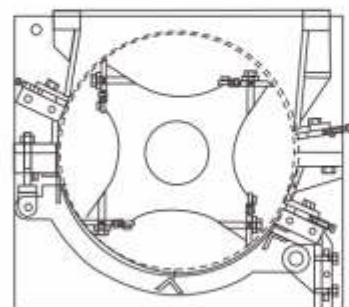

刀結構示意圖
Knives Structure Diagram



特點: Feature

- 機體使用厚鋼板，使用螺絲鎖住後再焊接完成，堅固耐用。
- 爪刀+斜刀設計分散主軸所承受的單位切削力，延長主軸使用年限。
- 獨立的軸承座可避免軸承堵塞損壞，方便直接加水粉碎。
- 外刀改為3把，增加篩網面積，加大產量。
- The body uses thick steel plate, complete with screw lock after welding, durable.
- Oblique knife claw knife + Design scattered spindle units are exposed cutting blades, extend spindle life.
- Separate bearing block bearing damage can be avoided, convenient and easy to direct water crushed.
- The outer blade to 3, increasing mesh size, and increase yields.

用途: Application

- 此系列粉碎機設計為機體與軸承座分離，可以加水粉碎，適用於資源回收利用，例如：PET、瓶、農用薄膜回收清洗粉碎，另外大回轉直徑可用于大型物回粉碎，例如：汽車保險杠、箱包等。
- This series of crusher is designed to separate the body and the bearing, you can add water crushed for recycling of resources, such as: PET, bottle, agricultural film recycling washing crushed, another big swing diameter can be used to crush large materials back, for example: car bumpers, bags and so on.

主要技術參數: Specification

型號	馬力	回轉直徑(Φ)	入料口尺寸	回轉刀數	固定刀數	工作量	機械重量	機械尺寸
Model	HP	mm	mm	Pcs	Pcs	Kg	Kg	(LxWxH)mm
FT-480-30	40HP	480	780x450	12	6	700~1200	2800	2000x1700x2400
FT-600-40	50HP	600	1010x550	16	6	850~1350	3500	2200x1900x2700
FT-600-50	60HP	700	1280x550	20	6	1100~1500	4200	2200x2200x2850
FT-700-40	60HP	700	1010x650	16	6	1200~1700	4000	2200x1900x2900
FT-700-50	75HP	700	1280x650	20	6	1300~2000	4500	2200x2200x2950

以上技術參數僅供參考，如有變更，恕不另行通知！The above technical parameters are for reference only and are subject to change without prior notice.


SLOW & SILENT

Side-gate Instant Recycling Machine Series

慢速靜音水口料立即回收設備

塑膠水口料自動回收: Side-gate Plastic Instant Auto-Recycling


- 在水口料取出的同時立即粉碎，保持粉碎料的干淨、干燥；在篩除粉塵、定比例的情況下，與原料混合，成型，製造良品，循環利用。關鍵須在最短周期內(60秒)使水口料不因氧化、濕化(吸收水蒸氣)污染，而造成塑料的物性——強度、應力、顏色光澤遭受破壞，故可提高產品的品質；立即回收水口料的好處在包括成本各材料的節省，流程管理的改進，競爭力的增強以及環境友善的製造活動。
- Granulate the side-gate material when it tool out from the unit, keep the granulated material clean and dry; Under the condition of dust screening and proportion setting, mix with raw material, moulding, produce good products, utilize it cycle. Do keep the physical properties of the plastics such as intensity, stress, color and gloss not be damaged in shortest cycle(60S)for side-gate material polluted by oxidation and vapor absorb, so it can improve the product quality; The advantage of instant side-gate material recycling is as follows reduce material cost, improve flow management, strengthen competition and create friendly environment.

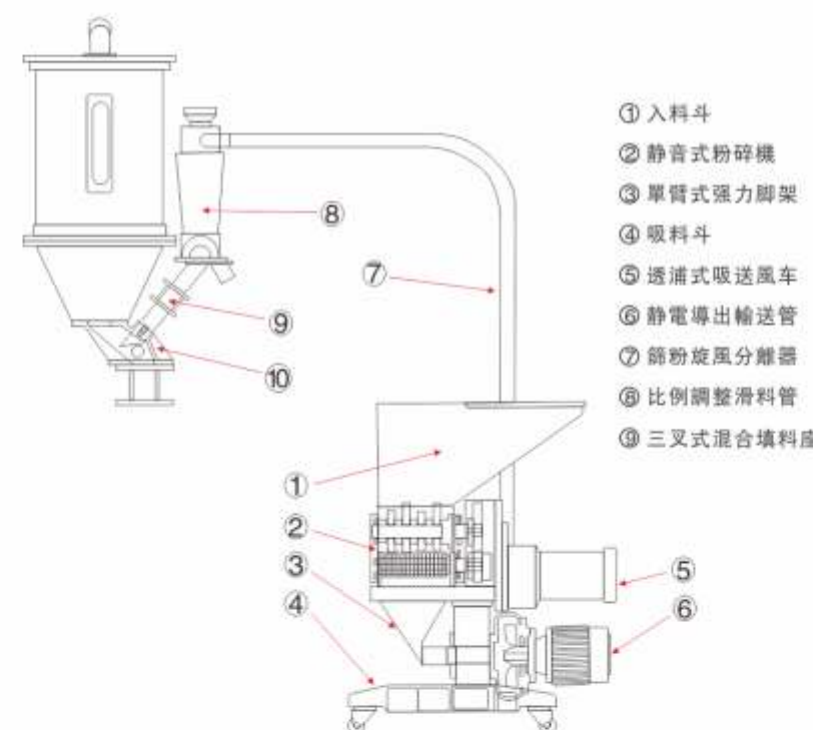

每分每秒產生的射出水口料有多少?

What is the Amount of Discharge Every Minute and Every Second?

	假設每小時產生的水口料量 Assuming that the Amount of Side-gate Every Hour						
	1Kg	1.5Kg	2Kg	2.5Kg	3Kg	4Kg	7Kg
一天24小時	24	36	48	60	72	96	168
一個月30天	720	1080	1440	1800	2160	2880	5040
三個月90天	2160	3240	4320	5400	6480	8640	15120
半年180天	4320	6480	8640	10800	12960	17280	30240
一年360天	8640	12960	17280	21600	25920	34560	60480

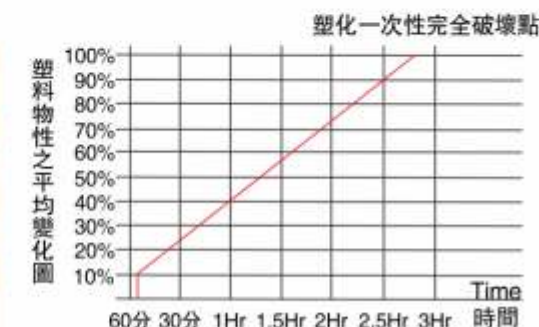

POWERFUL

Crushing Machine Series

斜刀剪切強力粉碎機系列



FT-301B 粉碎機
FT-301B Crusher



FT-315B 粉碎機
FT-315B Crusher



FT-302B 粉碎機
FT-302B Crusher

POWERFUL

Crushing Machine Series

斜刀剪切強力粉碎機系列



特點: Feature

- 開啟式設計, 內部鍍鉻光滑處理, 不污染料。上機座可掀開, 網架亦可放下, 清理簡單快捷。
- 本機刀具內外皆為斜2度, 上下落差有16mm, 剪切力很大, 節省馬力消耗。
- 安全措施齊全, 機座掀開時則無法啟動機械馬達, 可掀開烤漆護蓋, 美觀安全方便。
- 活動輪機架, 移動方便, 不鏽鋼進料斗, 結構特殊, 不噴料。回轉速低RPM345, 噪音低。
- Material startup design, inside Chrome-plating process for smoothening, no material polluting. Up machine stand can be opened, and steel pod can be put down, easy for cleaning.
- The inside and outside angle of cutting tool are tilt 2 degree, the drop difference is 16mm, cutting force is big, can save horsepower consumption.
- Complete safe measures, when open open the machine stand the mechanical motor can not be startup, mice and safe.
- Moveable convey shelf, easy for moving, stainless steel feed hopper, special construction, no material spraying. Return rotating speed is R.P.M345, low noise.

主要技術參數: Specification

型號	馬力	入料口尺寸	回轉刀數	固定刀數	工作量	機械重量	機械尺寸
Model	HP	Inlet Size	Rotary Cutters	Fixed Cutters	Capacity	N.W	Machine Size
		mm	Pcs	Pcs	Kg	Kg	(LxWxH)mm
FT-301B	3HP	168x176	3排x1PC	2排x1PC	100~300	250	570x860x1030
FT-302B	5HP	200x246	3排x1PC	2排x1PC	200~350	320	560x1000x1200
FT-312B	10HP	220x304	3排x1PC 或 3排x2PC	2排x2PC	250~450	400	730x1000x1300
FT-315B	15HP	250x390	3排x1PC 或 3排x2PC	2排x1PC	300~550	450	870x1300x1400

※ 以上技術參數僅供參考, 如有變更, 恕不另行通知! The above technical parameters are for reference only and are subject to change without prior notice.

SPONGE CRUSHER

High Yield and Fine Crushing Machine Series

(高產能)海綿細碎粉碎機系列



特點: Feature

- 整機由主機、風機、分離器、集粉器、除塵器等組成；
- 採用刀片切割和高速氣流衝擊，碰撞雙重粉碎功能於一體，並能同時完成微料分選加工工序；
- 粉碎室採用多級破碎流程及細碎原理裝置，其特點是工作衝擊力大、生產效率高、細碎能力強；
- 設計合理、結構緊湊，安全、耐用，生產效率高；
- 噪音小、耗能少、加工成本低。
- The whole machine consists of a main machine, a fan, a separator, a powder collector and a dust collector;
- Using blade cutting and high speed airflow impact, the collision dual crushing function is integrated, and the micro material separation and processing process can be completed at the same time;
- The crushing chamber adopts multi-stage crushing process and fine crushing principle device, which is characterized by large working impact, high production efficiency and strong ability of fine crushing.
- Reasonable design, compact structure, safe, durable, high production efficiency;
- Low noise, low energy consumption and low processing cost.

THIN PLASTIC FILM

Waste Material Recycling Machine Series

薄膜邊料回收機系列

用途: Application

- 适用于螺杆 ϕ 45mm以上的挤出机回收边料适用之。針對小型挤出機或較寬PP、PE、HIPE、LOPE、縮收膜、PE保鮮膜...等薄膜、气泡布的边料100%粉碎立即回收(厚度0.01-0.08mm, 寬度30mm以下的边料)。
- This machine can be operated in coordination with extruder which has screws over 45mm to help recycle waste materials. This machine can help smaller extruder and crush wider PP、PE、HIPE、LOPE、Shrink membrane, PE membrane etc. immediately, and recycle them at 100%. This machine can process 0.01-0.08mm materials (thickness) and under 50mm materials (width).

特點: Feature

- 本系列產品採用鎢鋼刀粉碎，使用正常情況下比一般粉碎刀壽命長10倍，使用時間約為400個工作天，才需更換研磨再使用。
- This machine adopts tungsten steel blades. Life of the blades will be ten times longer than other blades under normal operation, they may be changed and ground after using 400 working days.



主要技术参数: Specification

型號	Model		DFG123AK/YK	DFG163AK/YK
粉碎機馬達	Crusher Motor	HP	1	2
回轉直徑 Φ	Rotary Diameter	mm	130	180
刀長	Knife Length	mm	123	163
固定刀數	Fixed Cutters	Pcs/set	2	2
回轉刀數	Rotary Cutters	Pcs/set	3	3
篩網孔徑 Φ	Screen Holes	mm	3-5	3-6
風車馬達	Blower Motor	HP	2	3
工作量	Capacity	Kg/nr	15-30	25-60
輸送螺桿馬達	Transmission Motor	HP	1/2-1	1
旋風分離器直徑 Φ	Separator Diameter	mm	250	250-350
長x寬x高	LxWxH	mm	1000x550x950	1050x600x1050
包裝尺寸	Packing Size	m	1.1x0.9x0.8	1.2x1.0x1.1
重量	Weight	Kg	120	150

※ 以上技術參數僅供參考，如有變更，恕不另行通知！The above technical parameters are for reference only and are subject to change without prior notice.



鎢鋼刀 Tungsten Steel Knife

THIN PLASTIC FILM

Waste Material Recycling Machine Series

薄膜邊料自動引取回收機系列



用途: Application

- 螺絲 $\phi 45\text{mm}$ 以上的押出機, 回收邊料適用 DFG123/163 RYK 型系列;
- 螺絲 $\phi 100\text{mm}$ 以上的押出機, 回收邊料適用 DFG123/163 RAK 型系列;
- 針對較厚或較寬, 速度較快 PP、PE、HIPE、LOPE、縮收膜、PE 保鮮膜... 等薄膜, 多層氣泡布的邊料 100% 粉碎立即回收, (厚度 $0.06\sim 1.2\text{mm}$, 寬度 100mm 以下的邊料)。

主要技術參數: Specification

型號	Model	DFG163RAK/RYP
粉碎機馬達	Crusher Motor	HP 2
回轉直徑 Φ	Rotary Diameter	mm 180
刀長	Knife Length	mm 163
固定刀數	Fixed Cutters	Pcs/set 2
回轉刀數	Rotary Cutters	Pcs/set 3
篩網孔徑 Φ	Screen Holes	mm 3-6
風車馬達	Blower Motor	HP 3
工作量	Capacity	Kg/nr 25-60
輸送螺絲馬達	Transmission Motor	HP 1
引取輪變頻馬達	Leading Motor	HP 1
長x寬x高	LxWxH	mm 1050x600x1050
包裝尺寸	Packing Size	m 1.2x1.0x1.1
重量	Weight	Kg 300

* 以上技術參數僅供參考, 如有變更, 恕不另行通知! The above technical parameters are for reference only and are subject to change without prior notice.

- This machine can be operated in coordination with extruder which has screws over 45mm to help recycle waste materials DFG123/163RYK.
- This machine can be operated in coordination with extruder which has screws over 100mm to help recycle waste materials DFG123/163RAK.
- This machine can recycle thicker and wider PP, PE, HIPE, LOPE, shrink membrane, PE membrane etc. and can achieve 100% effect of recycling. This machine can process $0.01\sim 0.08\text{mm}$ materials (thickness) and under 50mm materials (width).



薄片式破碎機

Membrane Crusher

SHEET LEFTOVERS MATERIAL

Recycling Machine Series

片材邊料回收機系列



特點: Feature

- 自動同步引取邊料粉碎裝袋或直接輸送到押出機料門內;
- 剪刀式設計, 內外刀具皆為斜 2° , 上下落差大, 剪切力很大, 節省馬力消耗。
- The machine can suck waste materials automatically and crush them. After that, it can put them in a bag or send them to extruder.
- Cutting-style design, inside and outside cutting tools are tilt 2° , and big cutting force, it can save horsepower consumption.

用途: Application

- $0.8\sim 2.0\text{mm}$ 之硬質料, 如 PP、PE、PVC、PS、ABS 等邊料, 此機型亦可如 DFG163AK 型安裝立即回收設備。
- This machine can crush ($0.8\sim 20\text{mm}$) soft and rigid waste materials such as PP, PE, PVC, ABS etc., This pattern can be used as recycling equipment, such as DFG163AK.

主要技術參數: Specification

型號	Model	DFG175FRTAK	DFG245FRTAK
粉碎機馬達	Crusher Motor	HP 3	5
回轉直徑 Φ	Rotary Diameter	mm 180	230
刀長	Knife Length	mm 175	245
固定刀數	Fixed Cutters	Pcs/set 2	2
回轉刀數	Rotary Cutters	Pcs/set 3	3
篩網孔徑 Φ	Screen Holes	mm 5	6
風車馬達	Blower Motor	HP 3	3
工作量	Capacity	Kg/nr 25-60	40-80
輸送螺絲馬達	Transmission Motor	HP 1-2	2
旋風分離器直徑 Φ	Separator Diameter	mm 250-350	250-350
引取輪寬度	Leading Wheel Width	mm 100-150	100-200
引取輪變頻馬達	Leading Motor	HP 1	1
長x寬x高	LxWxH	mm 1150x550x1050	1350x750x1100
包裝尺寸	Packing Size	m 1.2x0.9x1.1	1.4x1.0x1.3
重量	Weight	Kg 350	420

* 以上技術參數僅供參考, 如有變更, 恕不另行通知! The above technical parameters are for reference only and are subject to change without prior notice.



THIN PLASTIC FILM

Crushing Material Metering and Recycling System

薄膜粉碎料計量回收系統



用途: Application

- 將吹袋機或分條機產生的薄膜不良品回收粉碎后, 直接經吹袋機計量回收, 可裝置於Φ75mm螺桿以上的押出機上, 規格可隨客戶需求定制。
- After the film defective products produced by bag-blowing machines or slitting machines are recycled and crushed, Directly through the bag-blower econometric recovery, Device for Φ above 75 mm screw extruding machine, Specifications can be customized according to customer requirements.

主要技術參數: Specification

型號	Model	DFG800A
進料螺桿馬達	Feed Screw Motor	HP 1HPx10-20:1
送料風車馬達	Blower Motor	HP 2
計量器	Metring Device	HP 1/2
變頻調速器	Speed Governor	HP 1
攪拌器馬達	Agitator Motor	HP 1/4HPx60:1
電器控制箱	Electric Control Box	Pcs 3
包裝尺寸	Packing Size	m 1.2x0.9x1.6
重量	Weight	Kg 160

※ 以上技術參數僅供參考, 如有變更, 恕不另行通知! The above technical parameters are for reference only and are subject to change without prior notice.

Y 型回收方式:
斜迫式送料螺桿
Type Y Recycling Mode:
Tilt Feeding Worm

A 型回收方式:
水平式送料螺桿
A Type Recycling Mode:
Horizontal Feeding Worm



送料螺桿

特點: Feature

- 送料螺桿採用進口耐龍塑鋼製造, 靜音、耐磨耐熱, 且耐用, 不斷裂, 不引發靜電等特點。
- The feeding worm adopts imported wearable plastic-steel, silent, wearable and heat resistance, long use life, no break, no static generated etc.feature.

VERTICAL TYPE

Heating and Drying Blending Machine Series

臥式加熱烘乾攪拌機系列



特點: Feature

- 機械材質可選用A3鐵或不鏽鋼。
- 加熱最高溫度可達300℃。
- 電控採用進口名產電器(台灣)。
- 進口名廠齒輪箱或進口減速馬達。
- 每分鐘8轉。(可依客戶要求訂做)
- The mechanical material can use A3 Iron or stainless steel.
- Maximum heating temperature can reach 300 °C centi-degree.
- Electrical control adopts imported famous equipments form (Taiwan).
- Imported gear box or imported gear.
- Rotating 8 cycles each minute.(Can design it as customer required)

主要技術參數: Specification

型號	馬力	電熱	工作量	機械重量	機械尺寸
Model	HP	Kw	Kg	Kg	Machine Size (LxWxH)mm
FT-200K	3HP	8	200	750	850x1300x1450
FT-400K	5HP	12	400	1200	960x1500x2150
FT-600K	7.5HP	18	600	1600	1060x1600x2140
FT-1000K	10HP	24	1000	2100	1360x2200x2800
FT-1500K	15HP	30	1500	3000	1500x2200x3000

※ 以上技術參數僅供參考, 如有變更, 恕不另行通知! The above technical parameters are for reference only and are subject to change without prior notice.

PLASTIC DYEING

Mixing Machine Series

塑膠染色混色機系列

特點: Feature

- 料桶及葉片採用不鏽鋼製造, 清洗容易。
- 混拌力強, 100公斤塑料可在3-5分鐘內均勻混合。
- 自動停止裝置, 可設定0-10分鐘自動停止。
- 附有門蓋安全開關, 保障操作者的安全。
- 附設料桶角度調校裝置, 方便卸料清洗。
- Material and vane are made of stainless steel, easy of cleaning.
- Powerful mixing and blending ability, it can mix 100kg plastic material within 3-5 minutes.
- Auto-stop device, can set auto-stop for 0-10 minutes.
- Equipped with door cover safety switch, to keep the operator safe.
- Equipped with material barrel angle adjustment device, easy of discharging and cleaning.



主要技术参数: Specification

型號	馬力	工作量	機械重量	機械尺寸
Model	HP	Kg	Kg	Machine Size (LxWxH)mm
FT-100	5HP	100	300	1100x770x1300
FT-200	7.5HP	200	450	1350x1150x1440
FT-300	10HP	300	550	1600x1290x1610

※ 以上技術參數僅供參考, 如有變更, 恕不另行通知! The above technical parameters are for reference only and are subject to change without prior notice.



主要技术参数: Specification

型號	馬力	工作量	機械重量	機械尺寸
Model	HP	Kg	Kg	Machine Size (LxWxH)mm
FT-50L	1HP	50	110	1250x880x1300
FT-100L	1HP	100	150	1300x950x1430

※ 以上技術參數僅供參考, 如有變更, 恕不另行通知! The above technical parameters are for reference only and are subject to change without prior notice.

RADAR

Dyestuff Mixer Series

雷達式混合機系列

特點: Feature

- 料桶採用不鏽鋼製, 清洗容易。
- 全方位360° 旋轉混合。
- 入料出料任意定位操作, 安全可靠。
- Material barrel is made of stainless steel, easy of cleaning.
- 360 degree free rotating for mixing.
- Load or discharge material can be set freely, safe and reliable.

VERTICAL

Color Mixing Machine Series

直立式混色機系列

特點: Feature

- 攪拌葉片及料桶全用不鏽鋼製造, 方便清洗。
- 接口打磨光滑, 絕無藏色粉之弊, 清洗快捷干淨。
- 攪拌葉可拆卸, 方便清潔保養。
- 密封式攪拌, 占地空間少。
- 混合速度快, 3-5分鐘即可攪拌均勻。
- Blending vane and material barrel are made of stainless steel.
- Port grinding smoothly, without any color powder hiding, easy of cleaning.
- Detachable blending vane, easy of cleaning and maintenance.
- Sealed blending, few space occupied.
- Speed is high, can blend it evenly within 3-5 minutes.

主要技术参数: Specification

型號	馬力	工作量	轉速	機械重量	機械尺寸
Model	HP	Kg	R.P.M	Kg	Machine Size (LxWxH)mm
FT-50G	3HP	50	68	100	1150x950x750
FT-100G	5.5HP	100	68	150	1200x1050x930
FT-150G	7.5HP	150	68	265	1200x1200x1300

※ 以上技術參數僅供參考, 如有變更, 恕不另行通知! The above technical parameters are for reference only and are subject to change without prior notice.



ROLLER

Color Mixing Machine Series

滾桶式混色機系列

特點: Feature

- 本機適用於塑膠粒、色粉、新舊混合、飼料食品混合等用途。
- 混料桶特殊設計, 採用不鏽鋼, 內面光滑, 不藏色粉, 清洗方便。
- 整體回轉混色, 節能、高效, 操作簡便。
- 附有0-30分鐘設定自動停止安全保護裝置, 確保使用人員的安全。
- The machine suits plastic pellets, color powder, new and old material and foodstuff mixing and other application.
- Mixing barrel is designed specially, which is made of stainless steel, smooth inner surface, no color powder hiding, easy of cleaning.
- Whole rotating color mixing, energy saving, high efficiency, easy for operation.
- Equipped with 0-30 minutes auto-stop setting device for safety, keep the operator safe.



VERTICAL

Storage Blending Machine Series

直立式貯料攪拌機系列

特點: Feature

- 攪拌均勻、快速，適用於各種塑膠料與色母的攪拌及貯料。
- 桶壁可選用不銹鋼或A3鐵，材質和尺寸可定制。
- 新舊料及色母混合更佳。
- Blending evenly, fast. Suitable for various plastic and basic dyestuff.
- Barrel wall can use stainless steel or A3 iron. Materials and dimensions are customizable.
- Best effect for new and old material and basic dyestuff.

主要技術參數: Specification


型號	馬力	工作量	機械尺寸
Model	HP	Kg	Machine Size (LxWxH)mm
FT-1T	4HP	1000	Φ1400x1200x800/2
FT-2T	5.5HP	2000	Φ1600x1510x1200/2
FT-3T	7.5HP	3000	Φ1900x1600x1400/2
FT-5T	10HP	5000	Φ2300x1800x1500/2

※ 以上技術參數僅供參考，如有變更，恕不另行通知！ The above technical parameters are for reference only and are subject to change without prior notice.

HYDRAULIC

Cutting Machine Series

FT-700H 油壓裁斷機

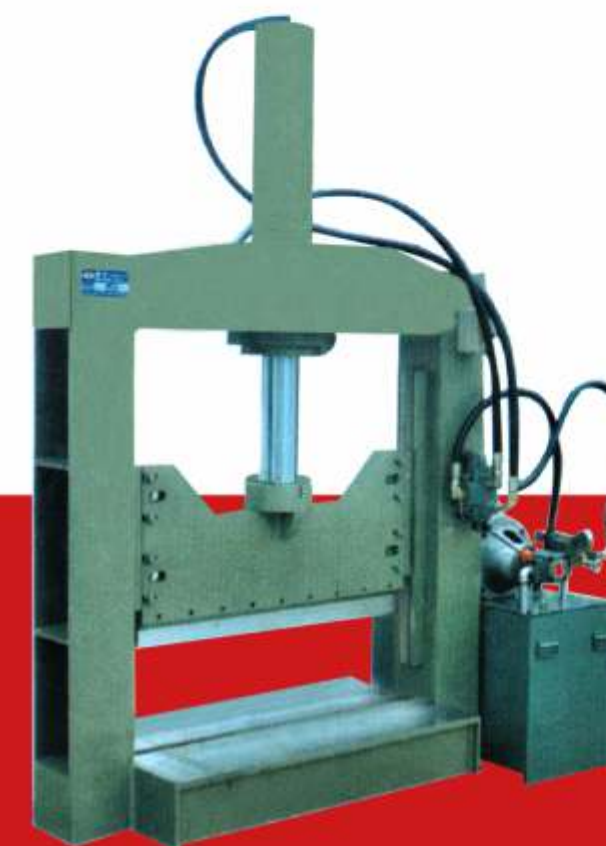

用途及特點: Application & Feature

- 本系列產品機械結構全鋼板焊接而成，堅固耐用。油壓系統進口零配件及進口電器組合裝配。本機適用於大型塑膠製品、大型管材、異型板材等裁斷再生利用。
- The mechanical construction of the product is made of steel and welding, solid and wearable. Hydraulic system is made of imported components and parts. The machines is suitable for large plastic products, large pipes, irregular-shape etc. cutting for reuse.

主要技術參數: Specification

型號	馬力	剪切高度	剪切寬度	工作壓力	機械尺寸
Model	HP	mm	mm	Kg	Machine Size (LxWxH)mm
FT-700H	7.5HP	700	1000	30000	1500x600x2300

※ 以上技術參數僅供參考，如有變更，恕不另行通知！ The above technical parameters are for reference only and are subject to change without prior notice.

PLASTIC

Palletizing Machine Series

塑膠切粒機系列

特點: Feature

- 固定刀為鎢鋼製造, 轉動刀(鳳梨刀)進口SKD-11 (或鎢鋼), 耐磨平穩。
- VS控制, 任意調速, 及進口電器組合。
- 設計精巧, 調刀容易。
- 開啟式結構, 清理簡單方便。
- Fixed knife is made of tungsten steel, rotating knife imported SKD-11, wearable and smooth.
- VS control, free of speed adjustment, and imported equipments combination.
- Excellent design, easy of knife adjusting.
- Open construction, easy of cleaning.

主要技術參數: Specification

型號	馬力	刀長	機械重量	機械尺寸
Model	HP	mm	N.W Kg	Machine Size (LxWxH)mm
FT-321	3-5HP	200	400	800x800x1200
FT-323	7.5HP	200	500	800x800x1200

※ 以上技術參數僅供參考, 如有變更, 恕不另行通知! The above technical parameters are for reference only and are subject to change without prior notice.



VIBRATING

Screen Machine Series

FT-802 振動篩選機

用途及特點: Application & Feature

- 此系列振動篩適用於醫藥、食品、化工、塑料等行業的顆粒分級及粉末的篩分。機械設計精巧耐用, 操作簡便, 換網容易, 清洗方便。雜質粗料自動排出, 可以自動化作業, 無機械動作保養, 故障少。與原料接觸部分均不銹鋼製成, 保證原料不受污染。
- The machine is suitable for the pellets grading and powder screening for medical, food, chemical and plastic industry etc. Mechanical design is compact and wearable, easy for operation, easy of change and cleaning. Automatically drain the impurity and coarse powder away. Auto-operating without mechanical action maintenance, few defects. All parts contact raw materials are made of stainless steel, it can prevent the material from polluting.

主要技術參數: Specification

型號	馬力	篩面尺寸	網層數	機械尺寸
Model	HP	mm	Mesh Layers Pcs	Machine Size (LxWxH)mm
FT-802	1HP	1040x500	2	1500x690x780

※ 以上技術參數僅供參考, 如有變更, 恕不另行通知! The above technical parameters are for reference only and are subject to change without prior notice.



SCREW

Conveyer Series

螺桿輸送機

用途及特點: Application & Feature

- 本系列產品機械設計結構簡便, 堅固耐用。使用範圍廣泛適合各種塑膠可粉狀物的輸送。機械噪音低, 占地面積小可活動移開, 方便操作。機械的材質可根據客戶的需要來定做。
- Product construction on machine design is simple, firm and wearable. Wide application, which is suitable for conveying various plastic powders or particles. Low machine noise, few area occupied for easy moving and operating. The machine material can be custom-made as customer's requirements.



FT-3M FT-4M

馬力 Motor: 2HP

管徑 Pipe Diameter: $\phi 8"$

機械長度 Machine Length: 3m

機械重量 Machine Weight: 350Kg

AUTOMATIC

Knife Grinding Machine

重切削刀磨刀機系列

特點: Feature

- 專門研磨各型粉碎機刀具及其它類刀具。
- 研磨長度達650mm。
- 進口名廠電器及砂輪,可承受長時間運作。
- 操作簡單方便,效果好。
- Specially for grinding the muller knife and other knives.
- Grinding length up to 650mm.
- Imported famous electronic equipment and grinding wheel, can bear long time working.
- Easy of operation for high efficiency.

主要技術參數: Specification

型號 Model	FT-650R
磨刀能力 Grinding Knife Capacity	L650xW120xH16
砂輪規格 (外徑x高x孔徑) Grinding Wheel	φ150x100x φ25.4
砂輪回轉數 Grinding Wheel Rotating Speed	3000R.P.M
砂輪 Grinding Wheel	2-3HP
馬達 Motor	左右自動 Auto. Left, Right
左右自動 Auto. Left, Right	4P-1/2HP
冷却泵浦 Cooling Pump	4P-1/8HP
床軌油壓潤滑系統 Bed Rail Lubrication System	特殊配件 Accessories
手動進刀裝置 Manual Feed Knife Device	特殊配件 Accessories
電器自動控制 Automatic Electrical Control	電磁式保護開關 Switch
機械尺寸 Machine Size	1120x870x960
機械重量 N.W	500Kg

※ 以上技術參數僅供參考,如有變更,恕不另行通知! The above technical parameters are for reference only and are subject to change without prior notice.



FTMF系列

Abrasive Powder Machine Series

高速磨粉機

用途: Application

- FTMF系列磨粉設備是目前最先進的粉體加工設備。適用於化工行業、塑膠工業、橡膠工業、原料改性、製造色母……行業廣泛應用。是生產廠家降低成本、節約開支、廢品回收再造的好幫手。
- The powder-grinding equipment is the most advanced equipment suitable for chemical, plastic industry, rubber industry, raw material handling, color making, etc. industry widely. It is the good helper for factory to reduce the costing, save money and recycle the waste.

主要技術參數: Specification

型號 Model	馬力 Motor HP	磨盤直徑(Φ) Disc Diameter mm	粒體細度 Granule Fineness mm	產量 Production Pcs
FTMF38	30HP	380	20-800目	25-250Kgs/h
FTMF61	60HP	610	20-800目	50-700Kgs/h
FTMF80	100HP	800	20-800目	70-900Kgs/h

※ 以上技術參數僅供參考,如有變更,恕不另行通知! The above technical parameters are for reference only and are subject to change without prior notice.



特點: Feature

- 設計結構緊湊、體積小、耗電低、產量高。
- 操作簡易,動刀與定刀間隙用手動調節,便於控制粉體大小。
- 刀具更換簡便、刀可反復修磨重複使用。
- 主機設有風、水循環冷卻系統。
- Compact construction design, low power consumption, high output.
- Easy for operation, manually adjust the clearance between moving the knife and fixing the knife, easy for control the powder size.
- Easy for knife replacement, and can be used repeatedly.
- The masrer equipment equips two cooling system by water and air.

HIGH-SPEED

Dyeing&Pelletizing Plant Series

高速染色造粒整廠設備




用途及特點: Application & Feature

- 此機採用高扭矩、低噪音的優質齒輪箱，強制潤滑冷卻系統，DC直流電機，性能穩定；
- 特殊螺桿、螺套設計，大大提高生產效率；
- 適合各種原料之復合改質制粒或染色制粒，如：PP、PE、PC、ABS、TPU等。
- This machine adopts high torque and low noise quality gear box, Forced lubrication cooling system, DC motor, stable performance;
- Special screw rod and screw sleeve design, greatly improve the production efficiency;
- It is suitable for compound modification of various raw materials, such as PP, PE, PC, ABS, TPU, etc.

HIGH-SPEED

Dyeing&Pelletizing Plant Series

高速染色造粒整廠設備

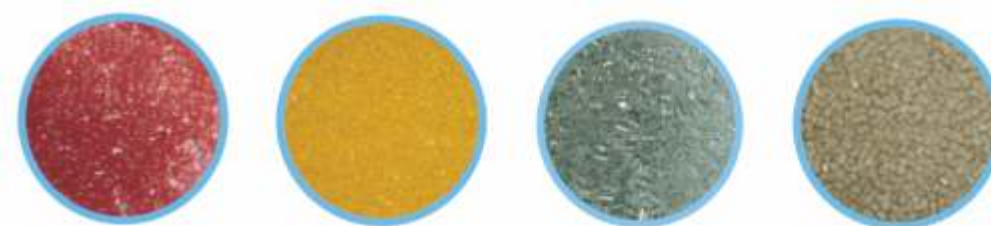

主要技術參數: Specification

		FT-80A	FT-100A	FT-120A	FT-150A	FT-175A
螺旋軸直徑 Screw Diameter	mm	80	100	120	150	175
螺旋軸長度比 Screw Length Ratio	L/D	1:32	1:32	1:32	1:32	1:32
主機馬達 Main Machine Motor	HP	30	40	60	75	100
自動控溫器 Auto. Temperature Controller	Set	6	7	7	7	8
電熱容量 Electric Capacity	Kw	30	40	55	75	85
油壓換網馬達 Hydraulic Motor	HP	2	2	3	3	5
押出量(1 hours) Extruder Capacity	Kg	100~200	150~250	200~300	250~400	400~600
冷卻水槽 Cooling Water Tank	mm	250x200x2440	300x250x2440	300x250x2440	350x250x2440	400x250x2440
吸水風車 Suction Water Blower	HP	1	1	2	2	2
切粒機馬力 Grain Cutting Machine Motor	HP	4HPV.S	5HPV.S	5HPV.S	7.5HPV.S	10HPV.S

* 以上技術參數僅供參考，如有變更，恕不另行通知！The above technical parameters are for reference only and are subject to change without prior notice.

SUB-FEMALE TYPE

Plastic Waste Recycling Granulator

雙脫氣子母式塑膠廢料再生造粒機




SUB-FEMALE TYPE

Plastic Waste Recycling Granulator

雙脫氣子母式塑膠廢料再生造粒機

用途及特點: Application & Feature

- 本機環保、節能，是企業生產資源回收再利用，降低浪費成本最理想之選，本機可對各類塑膠製品回收再生，如：對不合格之PP,HDPE,LDPE,廢舊薄膜袋廢品，及PS,ABS,HIPS等之廢品經粉碎加以處理，重新制成塑膠粒子再利用。
- With the rapid development of society, awareness of environment issue and requirement of reducing production cost, recycling resources and then reutilizing them is imminent to us. This machine is especially designed for processing substandard waste pp and HDPE, and LDPE, and waste PS, ABS, HIPS, under crushing into raw material, the regenerated granules can be reutilized.

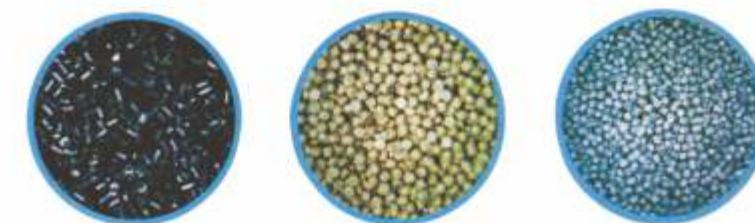

主要技术参数: Specification

押出主機型號 Main Extruder Type	螺旋軸直徑 Screw Diameter	螺旋軸長度比 Screw Length Ratio	主機馬達 Main Motor	自動控溫器 Temperature Controller	電熱容量 Electric Capacity	油壓換網馬達 Hydraulic Motor	強迫給料馬達 Force-feed Motor	子機 Sub-machine
	mm	L/D	HP	Set	Kw	HP	HP	
FT-100A	100	1:28	50	7	32	3	3	
FT-120A	120	1:28	60	7	40	3	3	
FT-150A	150	1:28	75	8	50	3	5	

※ 以上技術參數僅供參考，如有變更，恕不另行通知！ The above technical parameters are for reference only and are subject to change without prior notice.

子機馬達 Sub-machine Motor	螺旋軸直徑 Screw Diameter	螺旋軸長度比 Screw Length Ratio	自動控溫器 Temperature Controller	電熱容量 Electric Capacity	押出量 (1hours) Extruder Capacity	冷却水槽 Cooling Tank	吸水風車 Blower	切粒機馬力 Granulating Motor
HP	mm	L/D	Set	Kw	Kg	mm	HP	HPV.S
15	100	1:12	3	12	100~200	300x250x2440	2	4
20	120	1:12	3	15	150~300	300x250x2440	2	5.5
30	150	1:12	4	18	250~400	350x250x2440	2	7.5

HIGH-SPEED

Pelleting Whole Plant Equipment

T.P.R 類塑膠高速造粒整廠設備




烘乾式攪拌機
Drying Type Blender



冷却式震動篩機
Cooling Type Vibration Screener



脱水機
Drying Machine

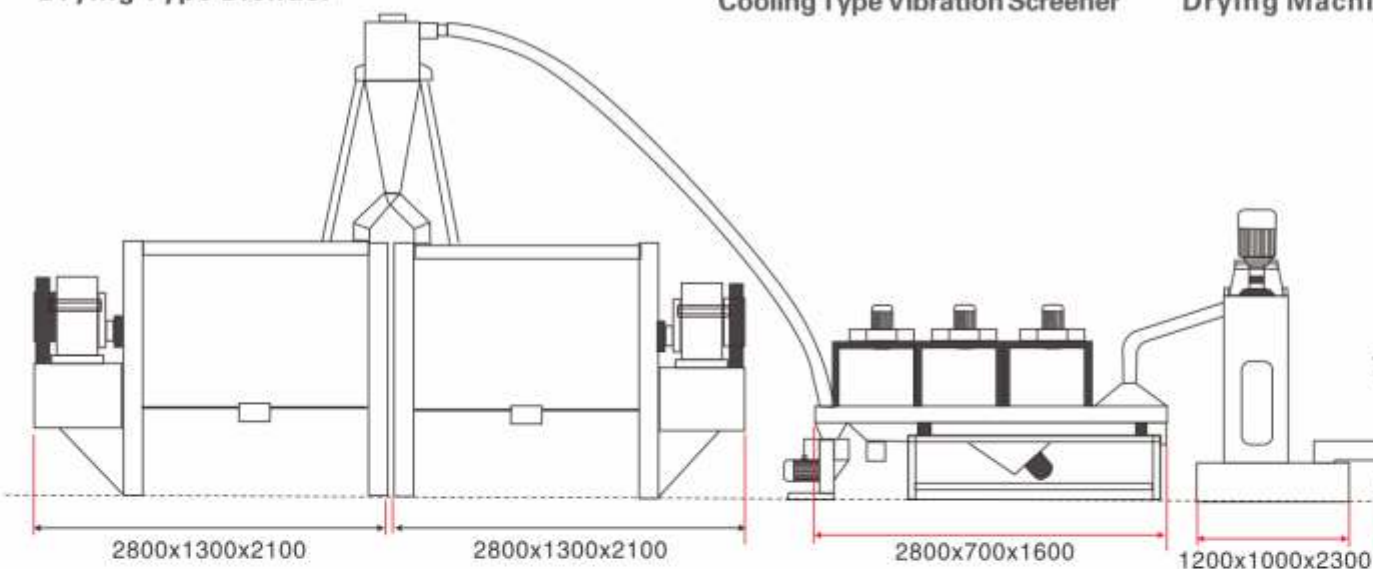

造粒機主要技術參數: Specification


押出主機型號 Main Extruder Type	螺旋軸直徑 Screw Diameter	螺旋軸長度比 Screw Length Ratio	主機馬達 Main Motor	自動控溫器 Temperature Controller	電熱容量 Electric Capacity	油壓換網馬達 Hydraulic Motor
	mm	L/D	HP	Set	Kw	HP
FT-120AT	120	1:12	60	4	20	3
FT-150AT	150	1:12	75	4	30	3

※ 以上技術參數僅供參考，如有變更，恕不另行通知！ The above technical parameters are for reference only and are subject to change without prior notice.

HIGH-SPEED

Pelleting Whole Plant Equipment



T.P.R 類塑膠高速造粒整廠設備

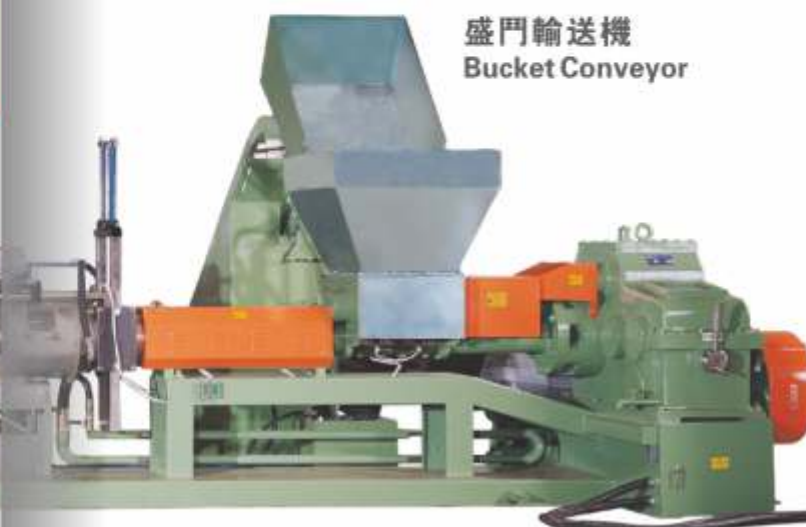

雙腕式造粒機
Double Wrist Pelleting Machine



密煉捏合機
Dispersion Kneader

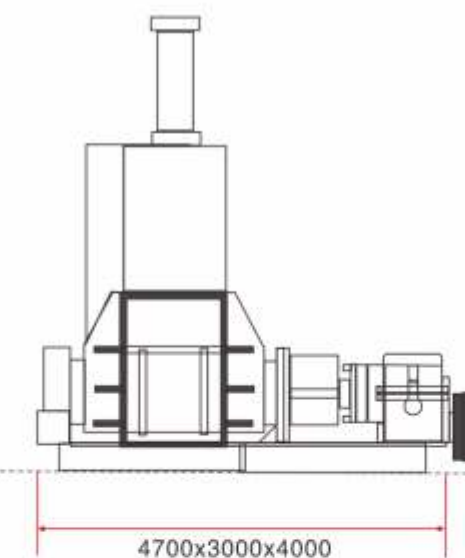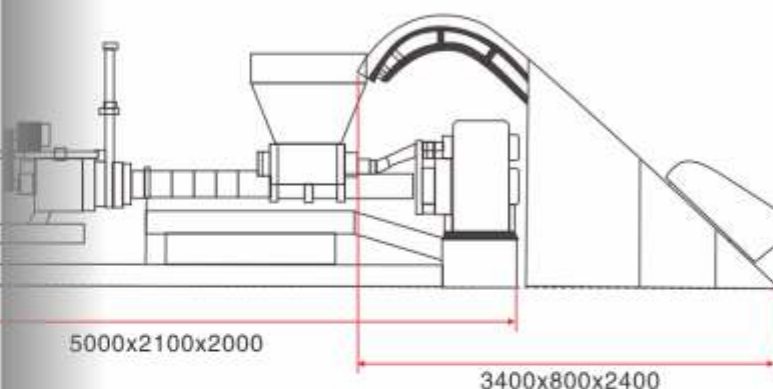

密煉(捏合)機主要技術參數: Specification

押出主機型號 Extruder Type	混合容量 Capacity	主機馬達 Main Motor	傾轉動力 Tilting Power	空壓機動力 Air Compress Power	集塵器動力 Dust Collector Power	溫度控制方式 Temperature Controller Mode	投料方式 Feeding Mode	機械重量 N.W	機械尺寸 Machine Size
	mm	HP	HP	HP	HP			Kg	(LxWxH)mm
FT-75L	75	125/150	5	7.5	2	自動控溫器 Temperature Controller	前/後 (F/R)	11000	3800x2400x3600
FT-110L	110	175/200	7.5	10	2		前/後 (F/R)	14000	4700x3000x4000

※ 以上技術參數僅供參考，如有變更，恕不另行通知！ The above technical parameters are for reference only and are subject to change without prior notice.